

LED Vapor Tight Direct-wire Fixtures

- Universal voltage 120-277 VAC
- 4 ft. Vapor Tight includes two (2) LED direct wire tubes
- No ballast
- Total output up to 6,200 lumens



Toggled Vapor Tight fixtures are ideal for: parking and home garages, workshops, cold storage and food processing facilities, dusty and wet environments and indoor equestrian facilities.

Toggled fixtures are designed to be compatible with any toggled LED direct wire tube.

Outstanding Product Performance

- Up to 70% energy savings
- Eliminates ballasts and maintenance costs
- Operating temperature -20 to 45° C
- IP65 waterproof, dust proof and weather proof

Superior Quality of Light

- Consistent color rendering, 80 CRI minimum
- UL classified and FCC compliant

Commercial-grade

- Housing: 100% UV stabilized polycarbonate, silicon perimeter gasket
- Gear tray: Flat, heavy gauge die-formed C.R.S. to contain all components
- Knockout: 3/4" conduit at single end
- Reliable start in cold temperatures
- Customizable color temperatures (3000K, 4000K, 5000K, 6500K, and gro)
- Total output up to 6,200 lumens




LED Vapor Tight Direct-wire Fixtures

Specifications

Tube Options with Fixtures

Model No.	Length	Input Voltage	Total Power (Watts)	Total Lumens	Efficacy	CRI	CCT	PF
FV420PO-E416-30310	4 feet	120-277 VAC	32	4,200	131	≥80	3000K	>0.9
FV420PO-E416-40310	4 feet	120-277 VAC	32	4,200	131	≥80	4000K	>0.9
FV420PO-E416-50310	4 feet	120-277 VAC	32	4,200	131	≥80	5000K	>0.9
FV420PO-E416-65310	4 feet	120-277 VAC	32	4,200	131	≥80	6500K	>0.9
FV420PO-A423-40230	4 feet	120-277 VAC	46	6,200	135	≥80	4000K	>0.9

Dimensions

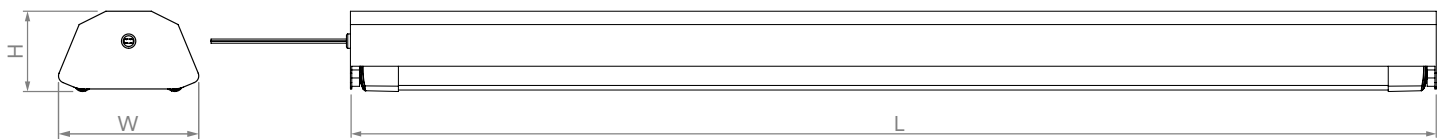

Fixture Model No.	Length	Width	Height
FV420PO	50in (1270mm)	5.5in (139.7mm)	3.875in (98.425mm)

Disclaimer: toggled reserves the right to make changes to specific items and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.