

High Bay LED Fixtures

- Universal voltage (120-277 VAC)
- 4, 6, and 8-lamp models
- No ballast, includes direct wire LED tubes
- 50,000 hour lifetime
- Total output up to 24,800 lumens



Designed for suspended lighting needs. Ideal for mounting heights of up to 24 feet.

Toggled fixtures are designed to be compatible with any toggled LED direct wire tube.

Outstanding Product Performance

- Up to 60% energy savings
- Eliminates ballasts and maintenance costs
- Designed for direct connection to building AC power, voltage 120-277 VAC
- Operating temperature -20 to 45°C

Superior Quality of Light

- Consistent color rendering, 80 CRI minimum
- UL listed

Commercial-grade

- Reliable start during cold temperatures
- All metal construction
- Durable white powder-coated finish

Top sellers:

- FH460DO-E416-50310 - 12,600 lumen output, 96 watts
- FH480DO-E416-50310 - 16,800 lumen output, 128 watts

Ordering Information - Optional hanging kit available upon request (Part #41-01780)

| Fixture | Type | Length | # Lamps | Style | Lens | Wire Termination | Tube Model # |
|----------------------|----------------------|----------------------|---|----------------------|--|---|----------------------|
| <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> |
| F = Fixture | H = Highbay | 4 = 4 feet | 4 = 4 lamps 6 = 6 lamps 8 = 8 lamps | 0 = Standard | D = None P = Prismatic W = Wireguard | 0 = None E = 6 ft. cord with 5-15 straight plug 6 = 6 ft. cord with stripped wire | See next page |




High Bay LED Fixtures

Specifications

| | Model No. | Length | Input Voltage | Total Power (Watts) | Total Lumens | Efficacy | CRI | CCT | PF |
|--------|--------------------|--------|---------------|---------------------|--------------|----------|-----|-------|------|
| 4 lamp | FH440DO-E416-30310 | 4 feet | 120-277 VAC | 64 | 8400 | 131 | ≥80 | 3000K | ≥0.9 |
| | FH440DO-E416-40310 | 4 feet | 120-277 VAC | 64 | 8400 | 131 | ≥80 | 4000K | ≥0.9 |
| | FH440DO-E416-50310 | 4 feet | 120-277 VAC | 64 | 8400 | 131 | ≥80 | 5000K | ≥0.9 |
| | FH440DO-E416-65310 | 4 feet | 120-277 VAC | 64 | 8400 | 131 | ≥80 | 6500K | ≥0.9 |
| | FH440DO-A423-40230 | 4 feet | 120-277 VAC | 92 | 12400 | 135 | ≥80 | 4000K | ≥0.9 |
| | FH440DO-A423-50230 | 4 feet | 120-277 VAC | 92 | 12400 | 135 | ≥80 | 5000K | ≥0.9 |
| 6 lamp | FH460DO-E416-30310 | 4 feet | 120-277 VAC | 96 | 12600 | 131 | ≥80 | 3000K | ≥0.9 |
| | FH460DO-E416-40310 | 4 feet | 120-277 VAC | 96 | 12600 | 131 | ≥80 | 4000K | ≥0.9 |
| | FH460DO-E416-50310 | 4 feet | 120-277 VAC | 96 | 12600 | 131 | ≥80 | 5000K | ≥0.9 |
| | FH460DO-E416-65310 | 4 feet | 120-277 VAC | 96 | 12600 | 131 | ≥80 | 6500K | ≥0.9 |
| | FH460DO-A423-40230 | 4 feet | 120-277 VAC | 138 | 18600 | 135 | ≥80 | 4000K | ≥0.9 |
| | FH460DO-A423-50230 | 4 feet | 120-277 VAC | 138 | 18600 | 135 | ≥80 | 5000K | ≥0.9 |
| 8 lamp | FH480DO-E416-30310 | 4 feet | 120-277 VAC | 128 | 16800 | 131 | ≥80 | 3000K | ≥0.9 |
| | FH480DO-E416-40310 | 4 feet | 120-277 VAC | 128 | 16800 | 131 | ≥80 | 4000K | ≥0.9 |
| | FH480DO-E416-50310 | 4 feet | 120-277 VAC | 128 | 16800 | 131 | ≥80 | 5000K | ≥0.9 |
| | FH480DO-E416-65310 | 4 feet | 120-277 VAC | 128 | 16800 | 131 | ≥80 | 6500K | ≥0.9 |
| | FH480DO-A423-40230 | 4 feet | 120-277 VAC | 184 | 24800 | 135 | ≥80 | 4000K | ≥0.9 |
| | FH480DO-A423-50230 | 4 feet | 120-277 VAC | 184 | 24800 | 135 | ≥80 | 5000K | ≥0.9 |

Dimensions

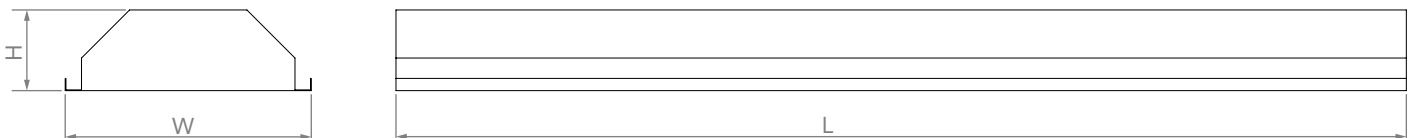

| Fixture Model No. | Length | Width | Height |
|-------------------|-----------------|----------------|--------------|
| FH440DO | 48.6in (1235mm) | 11.8in (300mm) | 3.9in (98mm) |
| FH460DO | 48.6in (1235mm) | 16.5in (420mm) | 3.9in (98mm) |
| FH480DO | 48.6in (1235mm) | 21.3in (540mm) | 3.9in (98mm) |

Disclaimer: toggled reserves the right to make changes to specific items and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.