



US008324817B2

(12) **United States Patent**
Ivey et al.

(10) **Patent No.:** **US 8,324,817 B2**
(45) **Date of Patent:** **Dec. 4, 2012**

(54) **LIGHT AND LIGHT SENSOR**
(75) Inventors: **John Ivey**, Farmington Hills, MI (US);
David L Simon, Grosse Pointe Woods,
MI (US)
(73) Assignee: **iLumisis, Inc.**, Troy, MI (US)
(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 357 days.

2,909,097 A 10/1959 Alden et al.
3,318,185 A 5/1967 Kott
3,561,719 A 2/1971 Grindle
3,586,936 A 6/1971 McLeroy
3,601,621 A 8/1971 Ritchie
3,612,855 A 10/1971 Juhnke
3,643,088 A 2/1972 Osteen et al.
3,746,918 A 7/1973 Drucker et al.
(Continued)

(21) Appl. No.: **12/572,471**
(22) Filed: **Oct. 2, 2009**

FOREIGN PATENT DOCUMENTS

CN 1584388 A 2/2005
(Continued)

(65) **Prior Publication Data**
US 2010/0102730 A1 Apr. 29, 2010

OTHER PUBLICATIONS

Wolsey, Robert. Interoperable Systems: The Future of Lighting Control, Lighting Research Center, Jan. 1, 1997, vol. 2 No. 2, Rensselaer Polytechnic Institute, Troy, New York [online]. Retrieved Lighting Research Center Web Page using Internet <URL: <http://www.lrc.rpi.edu/programs/Futures/LF-BAS/index.asp>>.

Related U.S. Application Data
(60) Provisional application No. 61/108,354, filed on Oct. 24, 2008.

(Continued)

Primary Examiner — Douglas W Owens
Assistant Examiner — Jonathan Cooper
(74) *Attorney, Agent, or Firm* — Young Basile

(51) **Int. Cl.**
H05B 37/03 (2006.01)
(52) **U.S. Cl.** **315/151**; 315/149; 315/152; 315/153
(58) **Field of Classification Search** 315/51,
315/152, 291, 294, 297; 362/234; 345/55;
340/458
See application file for complete search history.


(57) **ABSTRACT**

An LED-based light tube for use in a conventional fluorescent fixture can feature a housing including a light transmitting portion. At least one electrical connector can be attached to the housing and configured for engagement with the conventional fluorescent fixture. At least one LED can be arranged to produce light in a direction toward the light transmitting portion. A sensor can be operable to detect a brightness level and output a corresponding signal. A controller can be in electrical communication with the at least one electrical connector and operable to control the at least one LED in response to the signal.

(56) **References Cited**
U.S. PATENT DOCUMENTS

54,511 A 2/1920 Owen
58,105 A 6/1921 Poritz
79,814 A 8/1929 Hoch
80,419 A 1/1930 Kramer
84,763 A 7/1931 Stange
D119,797 S 4/1940 Winkler et al.
D125,312 S 2/1941 Logan

16 Claims, 2 Drawing Sheets

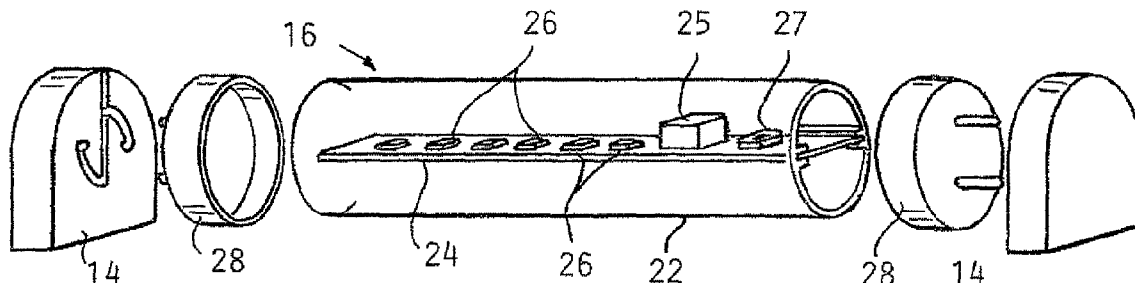

U.S. PATENT DOCUMENTS		
3,818,216 A	6/1974	Larraburu
3,832,503 A	8/1974	Crane
3,858,086 A	12/1974	Anderson et al.
3,909,670 A	9/1975	Wakamatsu et al.
3,924,120 A	12/1975	Cox, III
3,958,885 A	5/1976	Stockinger et al.
3,974,637 A	8/1976	Bergey et al.
3,993,386 A	11/1976	Rowe
4,001,571 A	1/1977	Martin
4,054,814 A	10/1977	Fegley et al.
4,070,568 A	1/1978	Gala
4,082,395 A	4/1978	Donato et al.
4,096,349 A	6/1978	Donato
4,102,558 A	7/1978	Krachman
4,107,581 A	8/1978	Abernethy
4,189,663 A	2/1980	Schmutzer et al.
4,211,955 A	7/1980	Ray
4,241,295 A	12/1980	Williams, Jr.
4,271,408 A	6/1981	Teshima et al.
4,272,689 A	6/1981	Crosby et al.
4,273,999 A	6/1981	Pierpoint
4,298,869 A	11/1981	Okuno
4,329,625 A	5/1982	Nishizawa et al.
4,339,788 A	7/1982	White et al.
4,342,947 A	8/1982	Bloyd
4,367,464 A	1/1983	Kurahashi et al.
D268,134 S	3/1983	Zurcher
4,382,272 A	5/1983	Quella et al.
4,388,567 A	6/1983	Yamazaki et al.
4,388,589 A	6/1983	Molldrem, Jr.
4,392,187 A	7/1983	Bornhorst
4,394,719 A	7/1983	Moberg
4,420,711 A	12/1983	Takahashi et al.
4,455,562 A	6/1984	Dolan et al.
4,500,796 A	2/1985	Quin
4,581,687 A	4/1986	Nakanishi
4,597,033 A	6/1986	Meggs et al.
4,600,972 A	7/1986	MacIntyre
4,607,317 A	8/1986	Lin
4,622,881 A	11/1986	Rand
4,625,152 A	11/1986	Nakai
4,635,052 A	1/1987	Aoike et al.
4,647,217 A	3/1987	Havel
4,656,398 A	4/1987	Michael et al.
4,661,890 A	4/1987	Watanabe et al.
4,668,895 A	5/1987	Schneiter
4,675,575 A	6/1987	Smith et al.
4,682,079 A	7/1987	Sanders et al.
4,686,425 A	8/1987	Havel
4,687,340 A	8/1987	Havel
4,688,154 A	8/1987	Nilssen
4,688,869 A	8/1987	Kelly
4,695,769 A	9/1987	Schweickardt
4,698,730 A	10/1987	Sakai et al.
4,701,669 A	10/1987	Head et al.
4,705,406 A	11/1987	Havel
4,707,141 A	11/1987	Havel
D293,723 S	1/1988	Buttner
4,727,289 A	2/1988	Uchida
4,740,882 A	4/1988	Miller
4,748,545 A	5/1988	Schmitt
4,753,148 A	6/1988	Johnson
4,758,173 A	7/1988	Northrop
4,771,274 A	9/1988	Havel
4,780,621 A	10/1988	Bartleucci et al.
4,794,383 A	12/1988	Havel
4,810,937 A	3/1989	Havel
4,818,072 A	4/1989	Mohebban
4,824,269 A	4/1989	Havel
4,837,565 A	6/1989	White
4,843,627 A	6/1989	Stebbins
4,845,481 A	7/1989	Havel
4,845,745 A	7/1989	Havel
4,857,801 A	8/1989	Farrell
4,863,223 A	9/1989	Weissenbach et al.
4,870,325 A	9/1989	Kazar
4,874,320 A	10/1989	Freed et al.
4,887,074 A	12/1989	Simon et al.
4,894,832 A	1/1990	Colak
4,901,207 A	2/1990	Sato et al.
4,912,371 A	3/1990	Hamilton
4,922,154 A	5/1990	Cacoub
4,934,852 A	6/1990	Havel
4,941,072 A	7/1990	Yasumoto et al.
4,943,900 A	7/1990	Gartner
4,962,687 A	10/1990	Belliveau et al.
4,965,561 A	10/1990	Havel
4,973,835 A	11/1990	Kurosu et al.
4,979,081 A	12/1990	Leach et al.
4,980,806 A	12/1990	Taylor et al.
4,992,704 A	2/1991	Stinson
5,003,227 A	3/1991	Nilssen
5,008,595 A	4/1991	Kazar
5,008,788 A	4/1991	Palinkas
5,010,459 A	4/1991	Taylor et al.
5,018,054 A	5/1991	Ohashi et al.
5,027,037 A	6/1991	Wei
5,027,262 A	6/1991	Freed
5,032,960 A	7/1991	Katoh
5,034,807 A	7/1991	Von Kohorn
5,036,248 A	7/1991	McEwan et al.
5,038,255 A	8/1991	Nishihashi et al.
5,065,226 A	11/1991	Kluitmans et al.
5,072,216 A	12/1991	Grange
5,078,039 A	1/1992	Tulk et al.
5,083,063 A	1/1992	Brooks
5,088,013 A	2/1992	Revis
5,089,748 A	2/1992	Ihms
5,103,382 A	4/1992	Kondo et al.
5,122,733 A	6/1992	Havel
5,126,634 A	6/1992	Johnson
5,128,595 A	7/1992	Hara
5,130,909 A	7/1992	Gross
5,134,387 A	7/1992	Smith et al.
5,140,220 A	8/1992	Hasegawa
5,142,199 A	8/1992	Elwell
5,151,679 A	9/1992	Dimmick
5,154,641 A	10/1992	McLaughlin
5,161,879 A	11/1992	McDermott
5,161,882 A	11/1992	Garrett
5,164,715 A	11/1992	Kashiwabara et al.
5,184,114 A	2/1993	Brown
5,194,854 A	3/1993	Havel
5,198,756 A	3/1993	Jenkins et al.
5,209,560 A	5/1993	Taylor et al.
5,220,250 A	6/1993	Szuba
5,225,765 A	7/1993	Callahan et al.
5,226,723 A	7/1993	Chen
5,254,910 A	10/1993	Yang
5,256,948 A	10/1993	Boldin et al.
5,278,542 A	1/1994	Smith et al.
5,282,121 A	1/1994	Bornhorst et al.
5,283,517 A	2/1994	Havel
5,287,352 A	2/1994	Jackson et al.
5,294,865 A	3/1994	Haraden
5,298,871 A	3/1994	Shimohara
5,301,090 A	4/1994	Hed
5,303,124 A	4/1994	Wrobel
5,307,295 A	4/1994	Taylor et al.
5,321,593 A	6/1994	Moates
5,323,226 A	6/1994	Schreder
5,329,431 A	7/1994	Taylor et al.
5,344,068 A	9/1994	Haessig
5,350,977 A	9/1994	Hamamoto et al.
5,357,170 A	10/1994	Luchaco et al.
5,371,618 A	12/1994	Tai et al.
5,374,876 A	12/1994	Horibata et al.
5,375,043 A	12/1994	Tokunaga
D354,360 S	1/1995	Murata
5,381,074 A	1/1995	Rudzewicz et al.
5,388,357 A	2/1995	Malita
5,402,702 A	4/1995	Hata
5,404,282 A	4/1995	Klinke et al.
5,406,176 A	4/1995	Sugden
5,410,328 A	4/1995	Yoksza et al.
5,412,284 A	5/1995	Moore et al.
5,412,552 A	5/1995	Fernandes

5,420,482 A	5/1995	Phares	5,851,063 A	12/1998	Doughty et al.
5,421,059 A	6/1995	Leffers, Jr.	5,852,658 A	12/1998	Knight et al.
5,430,356 A	7/1995	Ference et al.	5,854,542 A	12/1998	Forbes
5,432,408 A	7/1995	Matsuda et al.	RE36,030 E	1/1999	Nadeau
5,436,535 A	7/1995	Yang	5,859,508 A	1/1999	Ge et al.
5,436,853 A	7/1995	Shimohara	5,865,529 A	2/1999	Yan
5,450,301 A	9/1995	Waltz et al.	5,890,794 A	4/1999	Abtahi et al.
5,461,188 A	10/1995	Drago et al.	5,896,010 A	4/1999	Mikolajczak et al.
5,463,280 A	10/1995	Johnson	5,907,742 A	5/1999	Johnson et al.
5,463,502 A	10/1995	Savage, Jr.	5,912,653 A	6/1999	Fitch
5,465,144 A	11/1995	Parker et al.	5,921,660 A	7/1999	Yu
5,475,300 A	12/1995	Havel	5,924,784 A	7/1999	Chliwnyj et al.
5,489,827 A	2/1996	Xia	5,927,845 A	7/1999	Gustafson et al.
5,491,402 A	2/1996	Small	5,934,792 A	8/1999	Camarota
5,493,183 A	2/1996	Kimball	5,943,802 A	8/1999	Tijanic
5,504,395 A	4/1996	Johnson et al.	5,946,209 A	8/1999	Eckel et al.
5,506,760 A	4/1996	Giebler et al.	5,949,347 A	9/1999	Wu
5,513,082 A	4/1996	Asano	5,952,680 A	9/1999	Strite
5,519,496 A	5/1996	Borgert et al.	5,959,547 A	9/1999	Tubel et al.
5,530,322 A	6/1996	Ference et al.	5,962,989 A	10/1999	Baker
5,544,809 A	8/1996	Keating et al.	5,962,992 A	10/1999	Huang et al.
5,545,950 A	8/1996	Cho	5,963,185 A	10/1999	Havel
5,550,440 A	8/1996	Allison et al.	5,974,553 A	10/1999	Gandar
5,559,681 A	9/1996	Duarte	5,980,064 A	11/1999	Metroyanis
5,561,346 A	10/1996	Byrne	5,998,925 A	12/1999	Shimizu et al.
D376,030 S	11/1996	Cohen	5,998,928 A	12/1999	Hipp
5,575,459 A	11/1996	Anderson	6,007,209 A	12/1999	Pelka
5,575,554 A	11/1996	Guritz	6,008,783 A	12/1999	Kitagawa et al.
5,581,158 A	12/1996	Quazi	6,011,691 A	1/2000	Schreffler
5,592,051 A	1/1997	Korkala	6,016,038 A	1/2000	Mueller et al.
5,600,199 A	2/1997	Martin, Sr. et al.	6,018,237 A	1/2000	Havel
5,607,227 A	3/1997	Yasumoto et al.	6,019,493 A	2/2000	Kuo et al.
5,608,290 A	3/1997	Hutchisson et al.	6,020,825 A	2/2000	Chansky et al.
5,614,788 A	3/1997	Mullins et al.	6,025,550 A	2/2000	Kato
5,621,282 A	4/1997	Haskell	6,028,694 A	2/2000	Schmidt
5,621,603 A	4/1997	Adamec et al.	6,030,099 A	2/2000	McDermott
5,621,662 A	4/1997	Humphries et al.	6,031,343 A	2/2000	Recknagel et al.
5,622,423 A	4/1997	Lee	D422,737 S	4/2000	Orozco
5,633,629 A	5/1997	Hochstein	6,056,420 A	5/2000	Wilson et al.
5,634,711 A	6/1997	Kennedy et al.	6,068,383 A	5/2000	Robertson et al.
5,640,061 A	6/1997	Bornhorst et al.	6,069,597 A	5/2000	Hansen
5,640,141 A	6/1997	Myllymaki	6,072,280 A	6/2000	Allen
5,642,129 A	6/1997	Zavracky et al.	6,084,359 A	7/2000	Hetzel et al.
5,655,830 A	8/1997	Ruskouski	6,086,220 A	7/2000	Lash et al.
5,656,935 A	8/1997	Havel	6,091,200 A	7/2000	Lenz
5,661,645 A	8/1997	Hochstein	6,092,915 A	7/2000	Rensch
5,673,059 A	9/1997	Zavracky et al.	6,095,661 A	8/2000	Lebens et al.
5,682,103 A	10/1997	Burrell	6,097,352 A	8/2000	Zavracky et al.
5,688,042 A	11/1997	Madadi et al.	6,116,748 A	9/2000	George
5,697,695 A	12/1997	Lin et al.	6,121,875 A	9/2000	Hamm et al.
5,701,058 A	12/1997	Roth	6,127,783 A	10/2000	Pashley et al.
5,712,650 A	1/1998	Barlow	6,132,072 A	10/2000	Turnbull et al.
5,721,471 A	2/1998	Begemann et al.	6,135,604 A	10/2000	Lin
5,725,148 A	3/1998	Hartman	6,139,174 A	10/2000	Butterworth
5,726,535 A	3/1998	Yan	6,149,283 A	11/2000	Conway et al.
5,731,759 A	3/1998	Finucan	6,150,774 A	11/2000	Mueller et al.
5,734,590 A	3/1998	Tebbe	6,151,529 A	11/2000	Batko
5,751,118 A	5/1998	Mortimer	6,158,882 A	12/2000	Bischoff, Jr.
5,752,766 A	5/1998	Bailey et al.	6,166,496 A	12/2000	Lys et al.
5,765,940 A	6/1998	Levy et al.	6,175,201 B1	1/2001	Sid
5,769,527 A	6/1998	Taylor et al.	6,175,220 B1	1/2001	Billig et al.
5,784,006 A	7/1998	Hochstein	6,181,126 B1	1/2001	Havel
5,785,227 A	7/1998	Akiba	6,183,086 B1	2/2001	Neubert
5,790,329 A	8/1998	Klaus et al.	6,183,104 B1	2/2001	Ferrara
5,803,579 A	9/1998	Turnbull et al.	6,184,628 B1	2/2001	Ruthenberg
5,803,580 A	9/1998	Tseng	6,196,471 B1	3/2001	Ruthenberg
5,803,729 A	9/1998	Tsimerman	6,203,180 B1	3/2001	Fleischmann
5,806,965 A	9/1998	Deese	6,211,626 B1	4/2001	Lys et al.
5,808,689 A	9/1998	Small	6,215,409 B1	4/2001	Blach
5,810,463 A	9/1998	Kawahara et al.	6,217,190 B1	4/2001	Altman et al.
5,812,105 A	9/1998	Van de Ven	6,219,239 B1	4/2001	Mellberg et al.
5,813,751 A	9/1998	Shaffer	6,227,679 B1	5/2001	Zhang et al.
5,813,753 A	9/1998	Vriens et al.	6,238,075 B1	5/2001	Dealey, Jr. et al.
5,821,695 A	10/1998	Vilaniyam et al.	6,241,359 B1	6/2001	Lin
5,825,051 A	10/1998	Bauer et al.	6,250,774 B1	6/2001	Begemann et al.
5,828,178 A	10/1998	York et al.	6,252,350 B1	6/2001	Alvarez
5,836,676 A	11/1998	Ando et al.	6,252,358 B1	6/2001	Xydis et al.
5,848,837 A	12/1998	Gustafson	6,268,600 B1	7/2001	Nakamura et al.
5,850,126 A	12/1998	Kanbar	6,273,338 B1	8/2001	White

6,275,397	B1	8/2001	McClain	6,666,689	B1	12/2003	Savage, Jr.
6,283,612	B1	9/2001	Hunter	6,667,623	B2	12/2003	Bourgault et al.
6,292,901	B1	9/2001	Lys et al.	6,674,096	B2	1/2004	Sommers
6,293,684	B1	9/2001	Riblett	6,676,284	B1	1/2004	Wynne Willson
6,297,724	B1	10/2001	Bryans et al.	6,679,621	B2	1/2004	West et al.
6,305,109	B1	10/2001	Lee	6,681,154	B2	1/2004	Nierlich et al.
6,305,821	B1	10/2001	Hsieh et al.	6,682,205	B2	1/2004	Lin
6,307,331	B1	10/2001	Bonasia et al.	6,683,419	B2	1/2004	Kriparos
6,310,590	B1	10/2001	Havel	6,700,136	B2	3/2004	Guida
6,323,832	B1	11/2001	Nishizawa et al.	6,712,486	B1	3/2004	Popovich et al.
6,325,651	B1	12/2001	Nishihara et al.	6,717,376	B2	4/2004	Lys et al.
6,334,699	B1	1/2002	Gladnick	6,717,526	B2	4/2004	Martineau et al.
6,340,868	B1	1/2002	Lys et al.	6,720,745	B2	4/2004	Lys et al.
6,354,714	B1	3/2002	Rhodes	6,726,348	B2	4/2004	Gloisten
6,361,186	B1	3/2002	Slayden	6,741,324	B1	5/2004	Kim
6,369,525	B1	4/2002	Chang et al.	D491,678	S	6/2004	Pieppgras
6,371,637	B1	4/2002	Atchinson et al.	D492,042	S	6/2004	Pieppgras
6,373,733	B1	4/2002	Wu et al.	6,744,223	B2	6/2004	Lafamme et al.
6,379,022	B1	4/2002	Amerson et al.	6,748,299	B1	6/2004	Motoyama
D457,667	S	5/2002	Pieppgras et al.	6,762,562	B2	7/2004	Leong
D457,669	S	5/2002	Pieppgras et al.	6,774,584	B2	8/2004	Lys et al.
D457,974	S	5/2002	Pieppgras et al.	6,777,891	B2	8/2004	Lys et al.
6,388,393	B1	5/2002	Illingworth	6,781,329	B2	8/2004	Mueller et al.
6,394,623	B1	5/2002	Tsui	6,787,999	B2	9/2004	Stimac et al.
D458,395	S	6/2002	Pieppgras et al.	6,788,000	B2	9/2004	Appelberg et al.
6,400,096	B1	6/2002	Wells et al.	6,788,011	B2	9/2004	Mueller et al.
6,404,131	B1	6/2002	Kawano et al.	6,791,840	B2	9/2004	Chun
6,411,022	B1	6/2002	Machida	6,796,680	B1	9/2004	Showers et al.
6,422,716	B2	7/2002	Henrici et al.	6,801,003	B2	10/2004	Schanberger et al.
6,428,189	B1	8/2002	Hochstein	6,806,659	B1	10/2004	Mueller et al.
D463,610	S	9/2002	Pieppgras et al.	6,814,470	B2	11/2004	Rizkin et al.
6,445,139	B1	9/2002	Marshall et al.	6,815,724	B2	11/2004	Dry
6,448,550	B1	9/2002	Nishimura	6,846,094	B2	1/2005	Luk
6,448,716	B1	9/2002	Hutchison	6,851,816	B2	2/2005	Wu et al.
6,459,919	B1	10/2002	Lys et al.	6,851,832	B2	2/2005	Tieszen
6,469,457	B2	10/2002	Callahan	6,853,151	B2	2/2005	Leong et al.
6,471,388	B1	10/2002	Marsh	6,853,563	B1	2/2005	Yang et al.
6,472,823	B2	10/2002	Yen	6,857,924	B2	2/2005	Fu et al.
6,473,002	B1	10/2002	Hutchison	6,860,628	B2	3/2005	Robertson et al.
D468,035	S	12/2002	Blanc et al.	6,866,401	B2	3/2005	Sommers et al.
6,488,392	B1	12/2002	Lu	6,869,204	B2	3/2005	Morgan et al.
6,495,964	B1	12/2002	Muthu et al.	6,871,981	B2	3/2005	Alexanderson et al.
6,527,411	B1	3/2003	Sayers	6,874,924	B1	4/2005	Hulse et al.
6,528,954	B1	3/2003	Lys et al.	6,879,883	B1	4/2005	Motoyama
6,528,958	B2	3/2003	Hulshof et al.	6,882,111	B2	4/2005	Kan et al.
6,538,375	B1	3/2003	Duggal et al.	6,883,929	B2	4/2005	Dowling
6,548,967	B1	4/2003	Dowling et al.	6,883,934	B2	4/2005	Kawakami et al.
6,568,834	B1	5/2003	Scianna	6,888,322	B2	5/2005	Dowling et al.
6,573,536	B1	6/2003	Dry	6,897,624	B2	5/2005	Lys et al.
6,577,072	B2	6/2003	Saito et al.	6,909,239	B2	6/2005	Gauna
6,577,080	B2	6/2003	Lys et al.	6,909,921	B1	6/2005	Bilger
6,577,512	B2	6/2003	Tripathi et al.	6,918,680	B2	7/2005	Seeberger
6,577,794	B1	6/2003	Currie et al.	6,921,181	B2	7/2005	Yen
6,578,979	B2	6/2003	Truttmann-Battig	6,936,968	B2	8/2005	Cross et al.
6,582,103	B1	6/2003	Popovich et al.	6,936,978	B2	8/2005	Morgan et al.
6,583,550	B2	6/2003	Iwasa et al.	6,940,230	B2	9/2005	Myron et al.
6,583,573	B2	6/2003	Bierman	6,948,829	B2	9/2005	Verdes et al.
6,585,393	B1	7/2003	Brandes et al.	6,957,905	B1	10/2005	Pritchard et al.
6,586,890	B2	7/2003	Min et al.	6,963,175	B2	11/2005	Archenhold et al.
6,590,343	B2	7/2003	Pederson	6,964,501	B2	11/2005	Ryan
6,592,238	B2	7/2003	Cleaver et al.	6,965,197	B2	11/2005	Tyan et al.
6,596,977	B2	7/2003	Muthu et al.	6,965,205	B2	11/2005	Pieppgras et al.
6,598,996	B1	7/2003	Lodhie	6,967,448	B2	11/2005	Morgan et al.
6,608,453	B2	8/2003	Morgan et al.	6,969,179	B2	11/2005	Sloan et al.
6,608,614	B1	8/2003	Johnson	6,969,186	B2	11/2005	Sonderegger et al.
6,609,804	B2	8/2003	Nolan et al.	6,969,954	B2	11/2005	Lys
6,612,712	B2	9/2003	Nepil	6,975,079	B2	12/2005	Lys et al.
6,612,717	B2	9/2003	Yen	6,979,097	B2	12/2005	Elam et al.
6,621,222	B1	9/2003	Hong	6,982,518	B2	1/2006	Chou et al.
6,623,151	B2	9/2003	Pederson	6,995,681	B2	2/2006	Pederson
6,624,597	B2	9/2003	Dowling et al.	6,997,576	B1	2/2006	Lodhie et al.
D481,484	S	10/2003	Cuevas et al.	7,004,603	B2	2/2006	Knight
6,634,770	B2	10/2003	Cao	D518,218	S	3/2006	Roberge et al.
6,634,779	B2	10/2003	Reed	7,008,079	B2	3/2006	Smith
6,636,003	B2	10/2003	Rahm et al.	7,014,336	B1	3/2006	Ducharme et al.
6,639,349	B1	10/2003	Bahadur	7,015,650	B2	3/2006	McGrath
6,641,284	B2	11/2003	Stopa et al.	7,018,063	B2	3/2006	Michael et al.
6,659,622	B2	12/2003	Katogi et al.	7,021,799	B2	4/2006	Mizuyoshi
6,660,935	B2	12/2003	Southard et al.	7,021,809	B2	4/2006	Iwasa et al.

7,024,256	B2	4/2006	Krzyzanowski et al.	7,228,190	B2	6/2007	Dowling et al.
7,031,920	B2	4/2006	Dowling et al.	7,231,060	B2	6/2007	Dowling et al.
7,033,036	B2	4/2006	Pederson	7,233,115	B2	6/2007	Lys
7,038,398	B1	5/2006	Lys et al.	7,233,831	B2	6/2007	Blackwell
7,038,399	B2	5/2006	Lys et al.	7,236,366	B2	6/2007	Chen
7,042,172	B2	5/2006	Dowling et al.	7,237,924	B2	7/2007	Martineau et al.
7,048,423	B2	5/2006	Stepanenko et al.	7,237,925	B2	7/2007	Mayer et al.
7,049,761	B2	5/2006	Timmermans et al.	7,239,532	B1	7/2007	Hsu et al.
7,052,171	B1	5/2006	Lefebvre et al.	7,241,038	B2	7/2007	Naniwa et al.
7,053,557	B2	5/2006	Cross et al.	7,242,152	B2	7/2007	Dowling et al.
7,064,498	B2	6/2006	Dowling et al.	7,246,926	B2	7/2007	Harwood
7,064,674	B2	6/2006	Pederson	7,246,931	B2	7/2007	Hsieh et al.
7,067,992	B2	6/2006	Leong et al.	7,248,239	B2	7/2007	Dowling et al.
7,077,978	B2	7/2006	Setlur et al.	7,249,269	B1	7/2007	Motoyama
7,080,927	B2	7/2006	Feuerborn et al.	7,249,865	B2	7/2007	Robertson
7,086,747	B2	8/2006	Nielson et al.	D548,868	S	8/2007	Roberge et al.
7,088,014	B2	8/2006	Nierlich et al.	7,252,408	B2	8/2007	Mazzochette et al.
7,088,904	B2	8/2006	Ryan, Jr.	7,253,566	B2	8/2007	Lys et al.
7,102,902	B1	9/2006	Brown et al.	7,255,457	B2	8/2007	Ducharme et al.
7,113,541	B1	9/2006	Lys et al.	7,255,460	B2	8/2007	Lee
7,114,830	B2	10/2006	Robertson et al.	7,256,554	B2	8/2007	Lys
7,114,834	B2	10/2006	Rivas et al.	7,258,458	B2	8/2007	Mochiachvili et al.
7,118,262	B2	10/2006	Negley	7,258,467	B2	8/2007	Saccomanno et al.
7,119,503	B2	10/2006	Kemper	7,259,528	B2	8/2007	Pilz
7,121,679	B2	10/2006	Fujimoto	7,262,439	B2	8/2007	Setlur et al.
7,122,976	B1	10/2006	Null et al.	7,264,372	B2	9/2007	Maglica
7,128,442	B2	10/2006	Lee et al.	7,267,467	B2	9/2007	Wu et al.
7,128,454	B2	10/2006	Kim et al.	7,270,443	B2	9/2007	Kurtz et al.
D532,532	S	11/2006	Maxik	7,271,794	B1	9/2007	Cheng et al.
7,132,635	B2	11/2006	Dowling	7,273,300	B2	9/2007	Mrakovich
7,132,785	B2	11/2006	Ducharme	7,274,045	B2	9/2007	Chandran et al.
7,132,804	B2	11/2006	Lys et al.	7,274,160	B2	9/2007	Mueller et al.
7,135,824	B2	11/2006	Lys et al.	D553,267	S	10/2007	Yuen
7,139,617	B1	11/2006	Morgan et al.	7,285,801	B2	10/2007	Eliashevich et al.
7,144,135	B2	12/2006	Martin et al.	7,288,902	B1	10/2007	Melanson
7,153,002	B2	12/2006	Kim et al.	7,296,912	B2	11/2007	Beauchamp
7,161,311	B2	1/2007	Mueller et al.	7,300,184	B2	11/2007	Ichikawa et al.
7,161,313	B2	1/2007	Piepgas et al.	7,300,192	B2	11/2007	Mueller et al.
7,161,556	B2	1/2007	Morgan et al.	D556,937	S	12/2007	Ly
7,164,110	B2	1/2007	Pitigoi-Aron et al.	D557,854	S	12/2007	Lewis
7,164,235	B2	1/2007	Ito et al.	7,303,300	B2	12/2007	Dowling et al.
7,165,863	B1	1/2007	Thomas et al.	7,306,353	B2	12/2007	Popovich et al.
7,165,866	B2	1/2007	Li	7,307,391	B2	12/2007	Shan
7,167,777	B2	1/2007	Budike, Jr.	7,308,296	B2	12/2007	Lys et al.
7,168,843	B2	1/2007	Striebel	7,309,965	B2	12/2007	Dowling et al.
D536,468	S	2/2007	Crosby	7,318,658	B2	1/2008	Wang et al.
7,178,941	B2	2/2007	Roberge et al.	7,319,244	B2	1/2008	Liu et al.
7,180,252	B2	2/2007	Lys et al.	7,319,246	B2	1/2008	Soules et al.
D538,950	S	3/2007	Maxik	7,321,191	B2	1/2008	Setlur et al.
D538,952	S	3/2007	Maxik et al.	7,326,964	B2	2/2008	Lim et al.
D538,962	S	3/2007	Elliott	7,327,281	B2	2/2008	Hutchison
7,186,003	B2	3/2007	Dowling et al.	7,329,031	B2	2/2008	Liaw et al.
7,186,005	B2	3/2007	Hulse	D563,589	S	3/2008	Hariri et al.
7,187,141	B2	3/2007	Mueller et al.	7,345,320	B2	3/2008	Dahm
7,190,126	B1	3/2007	Paton	7,348,604	B2	3/2008	Matheson
7,192,154	B2	3/2007	Becker	7,350,936	B2	4/2008	Ducharme et al.
7,198,387	B1	4/2007	Gloisten et al.	7,350,952	B2	4/2008	Nishigaki
7,201,491	B2	4/2007	Bayat et al.	7,352,138	B2	4/2008	Lys et al.
7,201,497	B2	4/2007	Weaver, Jr. et al.	7,352,339	B2	4/2008	Morgan et al.
7,202,613	B2	4/2007	Morgan et al.	7,353,071	B2	4/2008	Blackwell et al.
7,204,615	B2	4/2007	Arik et al.	7,358,679	B2	4/2008	Lys et al.
7,204,622	B2	4/2007	Dowling et al.	7,358,929	B2	4/2008	Mueller et al.
7,207,696	B1	4/2007	Lin	7,374,327	B2	5/2008	Schexnaider
7,210,818	B2	5/2007	Luk et al.	7,378,805	B2	5/2008	Oh et al.
7,210,957	B2	5/2007	Mrakovich et al.	7,385,359	B2	6/2008	Dowling et al.
7,211,959	B1	5/2007	Chou	7,391,159	B2	6/2008	Harwood
7,213,934	B2	5/2007	Zarian et al.	7,396,146	B2	7/2008	Wang
7,217,004	B2	5/2007	Park et al.	7,401,935	B2	7/2008	VanderSchuit
7,217,012	B2	5/2007	Southard et al.	7,401,945	B2	7/2008	Zhang
7,217,022	B2	5/2007	Ruffin	7,427,840	B2	9/2008	Morgan et al.
7,218,056	B1	5/2007	Harwood	7,429,117	B2	9/2008	Pohlert et al.
7,218,238	B2	5/2007	Right et al.	7,434,964	B1	10/2008	Zheng et al.
7,220,015	B2	5/2007	Dowling	7,438,441	B2	10/2008	Sun et al.
7,220,018	B2	5/2007	Crabb et al.	D580,089	S	11/2008	Ly et al.
7,221,104	B2	5/2007	Lys et al.	D581,556	S	11/2008	To et al.
7,221,110	B2	5/2007	Sears et al.	7,449,847	B2	11/2008	Schanberger et al.
7,224,000	B2	5/2007	Aanegola et al.	D582,577	S	12/2008	Yuen
7,226,189	B2	6/2007	Lee et al.	D584,428	S	1/2009	Li et al.
7,228,052	B1	6/2007	Lin	7,476,002	B2	1/2009	Wolf et al.

7,476,004	B2	1/2009	Chan	2004/0105264	A1	6/2004	Spero	
7,478,924	B2	1/2009	Robertson	2004/0113568	A1	6/2004	Dowling et al.	
D586,484	S	2/2009	Liu et al.	2004/0116039	A1	6/2004	Mueller et al.	
D586,928	S	2/2009	Liu et al.	2004/0124782	A1	7/2004	Yu	
7,490,957	B2	2/2009	Leong et al.	2004/0130909	A1	7/2004	Mueller et al.	
7,497,596	B2	3/2009	Ge	2004/0141321	A1	7/2004	Dowling et al.	
7,507,001	B2	3/2009	Kit	2004/0155609	A1	8/2004	Lys et al.	
7,510,299	B2	3/2009	Timmermans et al.	2004/0160199	A1	8/2004	Morgan et al.	
7,520,635	B2	4/2009	Wolf et al.	2004/0178751	A1	9/2004	Mueller et al.	
7,521,872	B2	4/2009	Bruning	2004/0189218	A1	9/2004	Leong et al.	
7,524,089	B2	4/2009	Park	2004/0189262	A1	9/2004	McGrath	
D593,223	S	5/2009	Komar	2004/0212320	A1	10/2004	Dowling et al.	
7,534,002	B2	5/2009	Yamaguchi et al.	2004/0212321	A1	10/2004	Lys et al.	
7,549,769	B2	6/2009	Kim et al.	2004/0212993	A1	10/2004	Morgan et al.	
7,556,396	B2	7/2009	Kuo et al.	2004/0223328	A1	11/2004	Lee et al.	
7,572,030	B2	8/2009	Booth et al.	2004/0240890	A1	12/2004	Lys et al.	
7,575,339	B2	8/2009	Hung	2004/0257007	A1	12/2004	Lys et al.	
7,602,559	B2	10/2009	Jang et al.	2005/0013133	A1	1/2005	Yeh	
7,619,366	B2	11/2009	Diederiks	2005/0024877	A1	2/2005	Frederick	
7,635,201	B2	12/2009	Deng	2005/0030744	A1	2/2005	Ducharme et al.	
D612,528	S	3/2010	McGrath et al.	2005/0035728	A1	2/2005	Schanberger et al.	
2001/0033488	A1	10/2001	Chliwnyj et al.	2005/0036300	A1	2/2005	Dowling et al.	
2001/0045803	A1	11/2001	Cencur	2005/0040774	A1	2/2005	Mueller et al.	
2002/0038157	A1	3/2002	Dowling et al.	2005/0041161	A1	2/2005	Dowling et al.	
2002/0044066	A1	4/2002	Dowling et al.	2005/0041424	A1	2/2005	Ducharme	
2002/0047569	A1	4/2002	Dowling et al.	2005/0043907	A1	2/2005	Eckel et al.	
2002/0047624	A1	4/2002	Stam et al.	2005/0044617	A1	3/2005	Mueller et al.	
2002/0047628	A1	4/2002	Morgan et al.	2005/0047132	A1	3/2005	Dowling et al.	
2002/0048169	A1	4/2002	Dowling et al.	2005/0047134	A1	3/2005	Mueller et al.	
2002/0057061	A1	5/2002	Mueller et al.	2005/0062440	A1	3/2005	Lys et al.	
2002/0060526	A1	5/2002	Timmermans et al.	2005/0063194	A1	3/2005	Lys et al.	
2002/0070688	A1	6/2002	Dowling et al.	2005/0078477	A1	4/2005	Lo	
2002/0074559	A1	6/2002	Dowling et al.	2005/0099824	A1	5/2005	Dowling et al.	
2002/0078221	A1	6/2002	Blackwell et al.	2005/0107694	A1	5/2005	Jansen et al.	
2002/0101197	A1	8/2002	Lys et al.	2005/0110384	A1	5/2005	Peterson	
2002/0113555	A1	8/2002	Lys et al.	2005/0116667	A1	6/2005	Mueller et al.	
2002/0130627	A1	9/2002	Morgan et al.	2005/0128751	A1	6/2005	Roberge et al.	
2002/0145394	A1	10/2002	Morgan et al.	2005/0141225	A1	6/2005	Striebel	
2002/0145869	A1	10/2002	Dowling	2005/0151489	A1	7/2005	Lys et al.	
2002/0152045	A1	10/2002	Dowling et al.	2005/0151663	A1	7/2005	Tanguay	
2002/0152298	A1	10/2002	Kikta et al.	2005/0154494	A1	7/2005	Ahmed	
2002/0153851	A1	10/2002	Morgan et al.	2005/0162093	A1	7/2005	Timmermans et al.	
2002/0158583	A1	10/2002	Lys et al.	2005/0174473	A1	8/2005	Morgan et al.	
2002/0163316	A1	11/2002	Lys et al.	2005/0174780	A1	8/2005	Park	
2002/0171365	A1	11/2002	Morgan et al.	2005/0184667	A1	8/2005	Sturman et al.	
2002/0171377	A1	11/2002	Mueller et al.	2005/0201112	A1	9/2005	Machi et al.	
2002/0171378	A1	11/2002	Morgan et al.	2005/0206529	A1	9/2005	St.-Germain	
2002/0176259	A1	11/2002	Ducharme	2005/0213320	A1	9/2005	Kazuhiro et al.	
2002/0179816	A1	12/2002	Haines et al.	2005/0213352	A1	9/2005	Lys	
2002/0195975	A1	12/2002	Schanberger et al.	2005/0213353	A1	9/2005	Lys	
2003/0011538	A1	1/2003	Lys et al.	2005/0218838	A1	10/2005	Lys	
2003/0028260	A1	2/2003	Blackwell	2005/0218870	A1	10/2005	Lys	
2003/0031015	A1	2/2003	Ishibashi	2005/0219860	A1	10/2005	Schexnaider	
2003/0057884	A1	3/2003	Dowling et al.	2005/0219872	A1	10/2005	Lys	
2003/0057886	A1	3/2003	Lys et al.	2005/0225979	A1	10/2005	Robertson et al.	
2003/0057887	A1	3/2003	Dowling et al.	2005/0231133	A1	10/2005	Lys	
2003/0057890	A1	3/2003	Lys et al.	2005/0236029	A1	10/2005	Dowling	
2003/0076281	A1	4/2003	Morgan et al.	2005/0236998	A1	10/2005	Mueller et al.	
2003/0085710	A1	5/2003	Bourgault et al.	2005/0242742	A1*	11/2005	Cheang et al.	315/149
2003/0095404	A1	5/2003	Becks et al.	2005/0248299	A1	11/2005	Chemel et al.	
2003/0100837	A1	5/2003	Lys et al.	2005/0253533	A1	11/2005	Lys et al.	
2003/0102810	A1	6/2003	Cross et al.	2005/0259424	A1	11/2005	Zampini, II et al.	
2003/0133292	A1	7/2003	Mueller et al.	2005/0264474	A1*	12/2005	Rast	345/55
2003/0137258	A1	7/2003	Piepgas et al.	2005/0265019	A1	12/2005	Sommers et al.	
2003/0185005	A1	10/2003	Sommers et al.	2005/0275626	A1	12/2005	Mueller et al.	
2003/0185014	A1	10/2003	Gloisten	2005/0276051	A1	12/2005	Caudle et al.	
2003/0189412	A1	10/2003	Cunningham	2005/0276053	A1	12/2005	Nortrup et al.	
2003/0222587	A1	12/2003	Dowling, Jr. et al.	2005/0276064	A1	12/2005	Wu et al.	
2004/0003545	A1	1/2004	Gillespie	2005/0281030	A1*	12/2005	Leong et al.	362/234
2004/0012959	A1	1/2004	Robertson et al.	2005/0285547	A1	12/2005	Piepgas et al.	
2004/0036006	A1	2/2004	Dowling	2006/0002110	A1	1/2006	Dowling et al.	
2004/0037088	A1	2/2004	English et al.	2006/0012987	A9	1/2006	Ducharme et al.	
2004/0052076	A1	3/2004	Mueller et al.	2006/0012997	A1	1/2006	Catalano et al.	
2004/0062041	A1	4/2004	Cross et al.	2006/0016960	A1	1/2006	Morgan et al.	
2004/0075572	A1	4/2004	Buschmann et al.	2006/0022214	A1	2/2006	Morgan et al.	
2004/0080960	A1	4/2004	Wu	2006/0028155	A1	2/2006	Young	
2004/0090191	A1	5/2004	Mueller et al.	2006/0028837	A1	2/2006	Mrakovich	
2004/0090787	A1	5/2004	Dowling et al.	2006/0034078	A1	2/2006	Kovacik et al.	
2004/0105261	A1	6/2004	Ducharme et al.	2006/0050509	A9	3/2006	Dowling et al.	

2006/0050514	A1	3/2006	Opolka	2007/0247851	A1	10/2007	Villard
2006/0066447	A1*	3/2006	Davenport et al. 340/458	2007/0258231	A1	11/2007	Koerner et al.
2006/0076908	A1	4/2006	Morgan et al.	2007/0258240	A1	11/2007	Ducharme et al.
2006/0092640	A1	5/2006	Li	2007/0263379	A1	11/2007	Dowling
2006/0098077	A1	5/2006	Dowling	2007/0274070	A1	11/2007	Wedell
2006/0104058	A1	5/2006	Chemel et al.	2007/0281520	A1	12/2007	Insalaco et al.
2006/0109648	A1	5/2006	Trenchard et al.	2007/0285926	A1	12/2007	Maxik
2006/0109649	A1	5/2006	Ducharme et al.	2007/0285933	A1	12/2007	Southard et al.
2006/0109661	A1	5/2006	Coushaine et al.	2007/0290625	A1	12/2007	He et al.
2006/0126325	A1	6/2006	Lefebvre et al.	2007/0291483	A1	12/2007	Lys
2006/0126338	A1	6/2006	Mighetto	2007/0296350	A1	12/2007	Maxik et al.
2006/0132061	A1	6/2006	McCormick et al.	2008/0003664	A1	1/2008	Tysoe et al.
2006/0132323	A1	6/2006	Grady, Jr.	2008/0007945	A1	1/2008	Kelly et al.
2006/0146531	A1	7/2006	Reo et al.	2008/0012502	A1	1/2008	Lys
2006/0152172	A9	7/2006	Mueller et al.	2008/0012506	A1	1/2008	Mueller et al.
2006/0158881	A1	7/2006	Dowling	2008/0013316	A1	1/2008	Chiang
2006/0170376	A1	8/2006	Piepgras et al.	2008/0013324	A1	1/2008	Yu
2006/0192502	A1	8/2006	Brown et al.	2008/0018261	A1	1/2008	Kastner
2006/0193131	A1	8/2006	McGrath et al.	2008/0037245	A1	2/2008	Chan
2006/0197661	A1	9/2006	Tracy et al.	2008/0037284	A1	2/2008	Rudisill
2006/0198128	A1	9/2006	Piepgras et al.	2008/0062680	A1	3/2008	Timmermans et al.
2006/0208667	A1	9/2006	Lys et al.	2008/0089075	A1	4/2008	Hsu
2006/0221606	A1	10/2006	Dowling et al.	2008/0092800	A1	4/2008	Smith et al.
2006/0221619	A1	10/2006	Nishigaki	2008/0093615	A1	4/2008	Lin et al.
2006/0232974	A1	10/2006	Lee et al.	2008/0093998	A1	4/2008	Dennerly et al.
2006/0262516	A9	11/2006	Dowling et al.	2008/0094837	A1	4/2008	Dobbins et al.
2006/0262521	A1	11/2006	Piepgras et al.	2008/0129211	A1	6/2008	Lin et al.
2006/0262544	A1	11/2006	Piepgras et al.	2008/0130267	A1	6/2008	Dowling et al.
2006/0262545	A1	11/2006	Piepgras et al.	2008/0151535	A1	6/2008	de Castris
2006/0273741	A1	12/2006	Stalker	2008/0158871	A1	7/2008	McAvoy et al.
2006/0274529	A1	12/2006	Cao	2008/0158887	A1	7/2008	Zhu et al.
2006/0285325	A1	12/2006	Ducharme et al.	2008/0164826	A1	7/2008	Lys
2007/0035255	A1	2/2007	Shuster et al.	2008/0164827	A1	7/2008	Lys
2007/0040516	A1	2/2007	Chen	2008/0164854	A1	7/2008	Lys
2007/0041220	A1	2/2007	Lynch	2008/0175003	A1	7/2008	Tsou et al.
2007/0047227	A1	3/2007	Ducharme	2008/0180036	A1	7/2008	Garrity et al.
2007/0053182	A1	3/2007	Robertson	2008/0186704	A1	8/2008	Chou et al.
2007/0053208	A1	3/2007	Justel et al.	2008/0192436	A1	8/2008	Peng et al.
2007/0064419	A1	3/2007	Gandhi	2008/0211419	A1	9/2008	Garrity
2007/0070621	A1	3/2007	Rivas et al.	2008/0224629	A1	9/2008	Melanson
2007/0070631	A1	3/2007	Huang et al.	2008/0224636	A1	9/2008	Melanson
2007/0081423	A1	4/2007	Chien	2008/0253125	A1	10/2008	Kang et al.
2007/0086754	A1	4/2007	Lys et al.	2008/0258631	A1*	10/2008	Wu et al. 315/129
2007/0086912	A1	4/2007	Dowling et al.	2008/0258647	A1	10/2008	Scianna
2007/0097678	A1	5/2007	Yang	2008/0285257	A1	11/2008	King
2007/0109763	A1	5/2007	Wolf et al.	2008/0290814	A1	11/2008	Leong et al.
2007/0115658	A1	5/2007	Mueller et al.	2008/0291675	A1	11/2008	Lin et al.
2007/0115665	A1	5/2007	Mueller et al.	2008/0315784	A1	12/2008	Tseng
2007/0120594	A1	5/2007	Balakrishnan et al.	2009/0002995	A1	1/2009	Lee et al.
2007/0127234	A1	6/2007	Jervey, III	2009/0016063	A1	1/2009	Hu
2007/0133202	A1	6/2007	Huang et al.	2009/0046473	A1	2/2009	Tsai et al.
2007/0139938	A1	6/2007	Petroski et al.	2009/0052186	A1	2/2009	Xue
2007/0145915	A1	6/2007	Roberge et al.	2009/0067182	A1	3/2009	Hsu et al.
2007/0147046	A1	6/2007	Arik et al.	2009/0086492	A1	4/2009	Meyer
2007/0152797	A1	7/2007	Chemel et al.	2009/0091938	A1	4/2009	Jacobson et al.
2007/0153514	A1	7/2007	Dowling et al.	2009/0140285	A1	6/2009	Lin et al.
2007/0159828	A1	7/2007	Wang	2009/0175041	A1	7/2009	Yuen et al.
2007/0165402	A1	7/2007	Weaver, Jr. et al.	2009/0185373	A1	7/2009	Grajcar
2007/0173978	A1	7/2007	Fein et al.	2009/0195186	A1	8/2009	Guest et al.
2007/0177382	A1	8/2007	Pritchard et al.	2009/0196034	A1	8/2009	Gherardini et al.
2007/0182387	A1	8/2007	Weirich	2009/0213588	A1	8/2009	Manes
2007/0188114	A1	8/2007	Lys et al.	2009/0273926	A1	11/2009	Deng
2007/0188427	A1	8/2007	Lys et al.	2009/0303720	A1	12/2009	McGrath
2007/0189026	A1	8/2007	Chemel et al.	2010/0019689	A1	1/2010	Shan
2007/0195526	A1	8/2007	Dowling et al.	2010/0027259	A1	2/2010	Simon et al.
2007/0195527	A1	8/2007	Russell	2010/0033964	A1	2/2010	Choi et al.
2007/0195532	A1	8/2007	Reisenauer et al.	2010/0103664	A1	4/2010	Simon et al.
2007/0205712	A1	9/2007	Radkov et al.				
2007/0206375	A1	9/2007	Piepgras et al.				
2007/0211463	A1	9/2007	Chevalier et al.				
2007/0228999	A1	10/2007	Kit				
2007/0235751	A1	10/2007	Radkov et al.	CN	2766345	Y	3/2006
2007/0236156	A1	10/2007	Lys et al.	CN	2869556	Y	2/2007
2007/0237284	A1	10/2007	Lys et al.	EP	0013782	B1	3/1983
2007/0240346	A1	10/2007	Li et al.	EP	0091172	A2	10/1983
2007/0241657	A1	10/2007	Radkov et al.	EP	0124924	B1	9/1987
2007/0242466	A1	10/2007	Wu et al.	EP	0174699	B1	11/1988
2007/0247842	A1	10/2007	Zampini et al.	EP	0197602	B1	11/1990
2007/0247847	A1	10/2007	Villard	EP	0214701	B1	3/1992
				EP	0262713	B1	6/1992
				EP	0203668	B1	2/1993

FOREIGN PATENT DOCUMENTS

EP 0272749 B1 8/1993
 EP 0337567 B1 11/1993
 EP 0390262 B1 12/1993
 EP 0359329 B1 3/1994
 EP 0403011 B1 4/1994
 EP 0632511 A2 1/1995
 EP 0432848 B1 4/1995
 EP 0403001 B1 8/1995
 EP 0525876 B1 5/1996
 EP 0714556 B1 1/1999
 EP 0458408 B1 9/1999
 EP 0578302 B1 9/1999
 EP 0723701 B1 1/2000
 EP 0787419 B1 5/2001
 EP 1195740 A2 4/2002
 EP 1016062 B1 8/2002
 EP 1195740 A3 1/2003
 EP 1149510 B1 2/2003
 EP 1056993 B1 3/2003
 EP 0766436 B1 5/2003
 EP 0924281 B1 5/2003
 EP 0826167 B1 6/2003
 EP 1147686 B1 1/2004
 EP 1142452 B1 3/2004
 EP 1145602 B1 3/2004
 EP 1422975 A1 5/2004
 EP 0890059 B1 6/2004
 EP 1348319 B1 6/2005
 EP 1037862 B1 7/2005
 EP 1346609 B1 8/2005
 EP 1321012 B1 12/2005
 EP 1610593 A2 12/2005
 EP 1415517 B1 5/2006
 EP 1415518 B1 5/2006
 EP 1438877 B1 5/2006
 EP 1166604 B1 6/2006
 EP 1479270 B1 7/2006
 EP 1348318 B1 8/2006
 EP 1399694 B1 8/2006
 EP 1461980 B1 10/2006
 EP 1110120 B1 4/2007
 EP 1440604 B1 4/2007
 EP 1047903 B1 6/2007
 EP 1500307 B1 6/2007
 EP 0922305 B1 8/2007
 EP 0922306 B1 8/2007
 EP 1194918 B1 8/2007
 EP 1048085 B1 11/2007
 EP 1763650 B1 12/2007
 EP 1776722 B1 1/2008
 EP 1459599 B1 2/2008
 EP 1887836 A2 2/2008
 EP 1579733 B1 4/2008
 EP 1145282 B1 7/2008
 EP 1157428 B1 9/2008
 EP 1337784 B1 6/2009
 EP 2013530 B1 8/2009
 GB 2215024 A 9/1989
 GB 2324901 A 11/1998
 JP 6-54103 U 7/1994
 JP H6-54103 7/1994
 JP 7-249467 9/1995
 JP 08-162677 6/1996
 JP 11-135274 A 5/1999
 JP 2001-238272 A 8/2001
 JP 2002-141555 A 5/2002
 JP 3098271 U 2/2004
 JP 2004-335426 11/2004
 JP 2005-158363 A 6/2005
 JP 2005-166617 A 6/2005
 JP 2005-347214 A 12/2005
 JP 2006-507641 A 3/2006
 JP 3139714 U 2/2008
 JP 2008-258124 A 10/2008
 KR 10-2004-0008244 A 1/2004
 KR 20-0430022 Y1 11/2006
 KR 10-0781652 B1 12/2007
 TW M337036 7/2008
 WO 9906759 A1 2/1999

WO 99/10867 A1 3/1999
 WO 99/31560 A2 6/1999
 WO 9945312 A1 9/1999
 WO 00/01067 A2 1/2000
 WO 02/25842 A2 3/2002
 WO 02/061330 A2 8/2002
 WO 02/069306 A2 9/2002
 WO 02/091805 A2 11/2002
 WO 02/098182 A2 12/2002
 WO 02/099780 A2 12/2002
 WO 03/026358 A1 3/2003
 WO 03/055273 A2 7/2003
 WO 03/067934 A2 8/2003
 WO 03/090890 A1 11/2003
 WO 03/096761 A1 11/2003
 WO 2004/021747 A2 3/2004
 WO 2004/023850 A2 3/2004
 WO 2004/032572 A2 4/2004
 WO 2004/100624 A2 11/2004
 WO 2005/031860 A2 4/2005
 WO 2005/052751 A2 6/2005
 WO 2005/060309 A2 6/2005
 WO 2005/084339 A2 9/2005
 WO 2005/089293 A2 9/2005
 WO 2005/089309 A2 9/2005
 WO 2006/023149 A2 3/2006
 WO 2006/044328 A1 4/2006
 WO 2006/093889 A2 9/2006
 WO 2006/127666 A2 11/2006
 WO 2006/127785 A2 11/2006
 WO 2006/133272 A2 12/2006
 WO 2006/137686 A1 12/2006
 WO 2007/081674 A1 7/2007
 WO 2007/094810 A2 8/2007
 WO 2007/090292 A1 8/2007
 WO 9957945 A1 11/2009
 WO 2010/030509 A2 3/2010

OTHER PUBLICATIONS

Experiment Electronic Ballast. Electronic Ballast for Fluorescent Lamps [online], Revised Fall of 2007. [Retrieved on Sep. 1, 1997]. Retrieved from Virginia Tech Web Page using Internet <URL: <http://www.ece.vt.edu/ece3354/labs/ballast.pdf>>.

Truck-Lite, LEDSelect—LED, Model 35, Clearance & Marker Lighting, [online], [retrieved on Jan. 13, 2000] Retrieved from Truck-Lite Web Page using Internet <URL: <http://trucklite.com/leds14.html>>.

Truck-Lite, LEDSelect—LED, Super 44, Stop, Turn & Tail Lighting, [online], [retrieved on Jan. 13, 2000] Retrieved from Truck-Lite Web Page using Internet <URL: <http://trucklite.com/leds2.html>>.

Truck-Lite, LEDSelect—LED, Model 45, Stop, Turn & Tail Lighting [online], [retrieved on Jan. 13, 2000] Retrieved from Truck-Lite Web Page using Internet <URL: <http://trucklite.com/leds4.html>>.

Telecite Products & Services—Display Options, [online], [retrieved on Jan. 13, 2000] Retrieved from Telecite Web page using Internet <URL: http://www.telecite.com/en/products/options_en.htm>.

Traffic Signal Products—Transportation Products Group, [online], [retrieved on Jan. 13, 2000] Retrieved from the Dialight Web Page using Internet <URL: <http://www.dialight.com/trans.htm>>.

LED Lights, Replacement LED lamps for any incandescent light, [online], [retrieved on Jan. 13, 2000] Retrieved from LED Lights Web Page using Internet <URL: <http://www.ledlights.com/replac.htm>>.

Ledtronics, Ledtronics Catalog, 1996, p. 10, Ledtronics, Torrance, California.

Piper. The Best Path to Efficiency. Building Operating Management, Trade Press Publishing Company May 2000 [online], [retrieved on Jan. 17, 2008]. Retrieved from Find Articles Web Page using Internet <URL: http://findarticles.com/p/articles/mi_qu3922/is_2000005/ai_n8899499/>.

Henson, Keith. The Benefits of Building Systems Integration. Access Control & Security Systems Integration, Oct. 1, 2000, Penton Media. [online], [retrieved on Oct. 24, 2008] Retrieved from Security Solutions Web page using Internet <URL: http://securitysolutions.com/mag/security_benefits_building_systems/>.

Phason Electronic Control Systems, Light Level Controller (LLC) case study. Nov. 30, 2004. 3 pages, Phason Inc., Winnipeg, Manitoba, Canada.

Airport International. Fly High With Intelligent Airport Building and Security Solutions [online], [retrieved on Oct. 24, 2008]. Retrieved from Airport International web page using Internet <URL: <http://www.airport-int.com/categories/airport-building-and-security-solutions/fly-high-with-intelligent-airport-building-and-security-solutions.html>>.

Spencer, Eugene. High Sales, Low Utilization. Green Intelligent Buildings, Feb. 1, 2007. [online]. Retrieved from Green Intelligent Buildings web page using Internet <URL: http://www.greenintelligentbuildings.com/CDA/IBT_Archive/BNP_GUID_9-5-2006_A_1000000000000056772>.

Sensor Switch, nLight Lighting Control System. [online], [retrieved on Jan. 11, 2008] Retrieved from Sensor Switch web page using Internet <URL: <http://www.sensorswitch.com>>.

Six Strategies, [online], [retrieved on Jan. 11, 2008] Retrieved from Encelium Technologies Inc. Web Page using Internet <URL: <http://www.encelium.com/products/strategies.html>>.

Lawrence Berkeley National Laboratory. Lighting Control System—Phase Cut Carrier. University of California, [online] [retrieved on Jan. 14, 2008] Retrieved from Lawrence Berkeley National Laboratory web page using Internet <URL: <http://www.lbl.gov/tt/techs/lbnl1871.html>>.

Best Practice Guide—Commercial Office Buildings—Central HVAC System. [online], [Retrieved on Jan. 17, 2008] Retrieved from Flex Your Power Organization web page using Internet <URL: <http://www.fypower.org/bpg/module.html?b=offices&m+Central+HVAC+Systems&s=Contr...>>.

Cornell University. Light Canopy—Cornell University Solar Decathlon, [online], [retrieved on Jan. 17, 2008] Retrieved from Cornell University web page using Internet <URL: <http://cusd.cornell.edu/cusd/web/index.php/page/show/section/Design/page/controls>>.

D.N.A.-III, [online], [retrieved Mar. 10, 2009] Retrieved from the PLC Lighting Web Page using Internet <URL: http://www.plclighting.com/product_info.php?cPath=1&products_id=92>.

E22201-44 Esprit Collection, [online], [retrieved on Jul. 10, 2010] Retrieved from ET2 Contemporary Lighting using Internet <URL: <http://www.et2online.com/proddetail.aspx?ItemID=22201-44>>.

E20116-18 Larnes Collection, [online], [retrieved on Jul. 10, 2010] Retrieved from ET2 Contemporary Lighting using Internet <URL: <http://www.et2online.com/proddetail.aspx?ItemID=20116-18>>.

E20112-22 Starburst Collection, [online], [retrieved on Jul. 10, 2010] Retrieved from ET2 Contemporary Lighting using Internet <URL: <http://www.et2online.com/proddetail.aspx?ItemID=E20116-18>>.

E20743-09 Stealth Collection, [online], [retrieved on Jul. 10, 2010] Retrieved from ET2 Contemporary Lighting using Internet <URL: <http://www.et2online.com/proddetail.aspx?ItemID=E20743-09>>.

E20524-10 & E20525-10 Curva Collection, [online], [retrieved on Jul. 10, 2010] Retrieved from ET2 Contemporary Lighting using Internet <URL: <http://www.et2online.com/proddetail.aspx?ItemID=E20524-10&E20525-10>>.

Written Opinion and International Search Report of the International Search Authority May 24, 2010 from the corresponding International Application No. PCT/US2009/060083 filed Oct. 9, 2009.

* cited by examiner

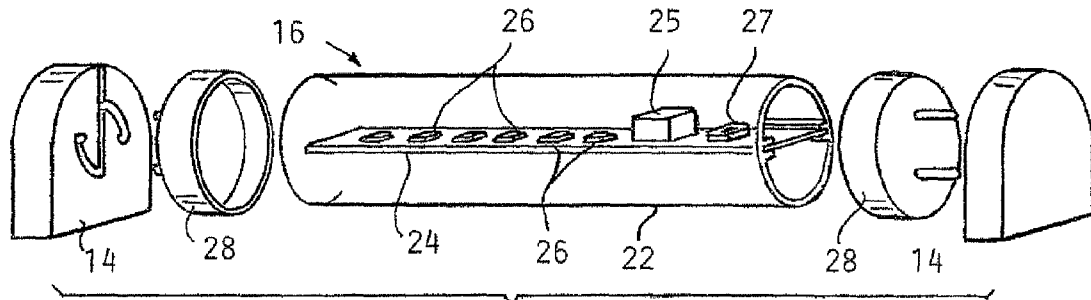


FIG. 1

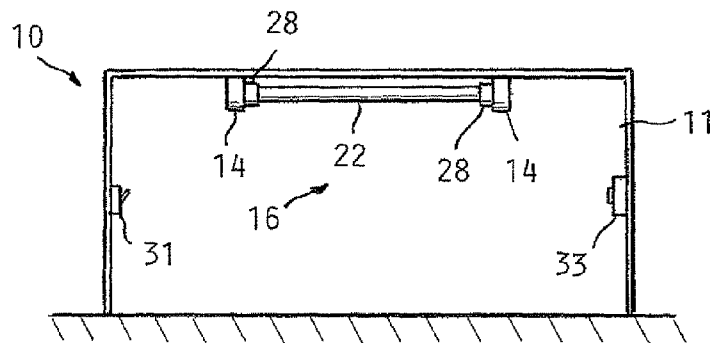


FIG. 2


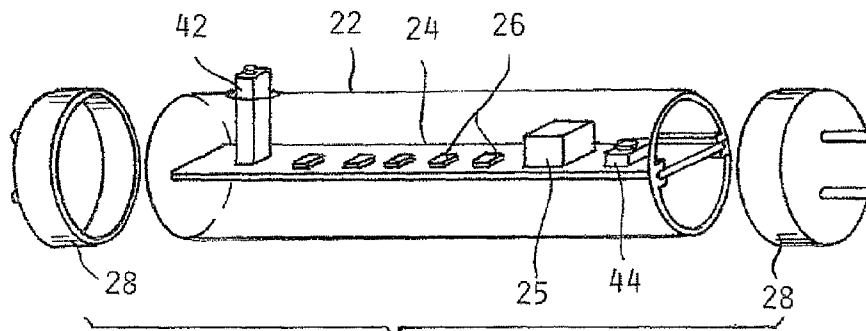


FIG. 3

FIG. 4

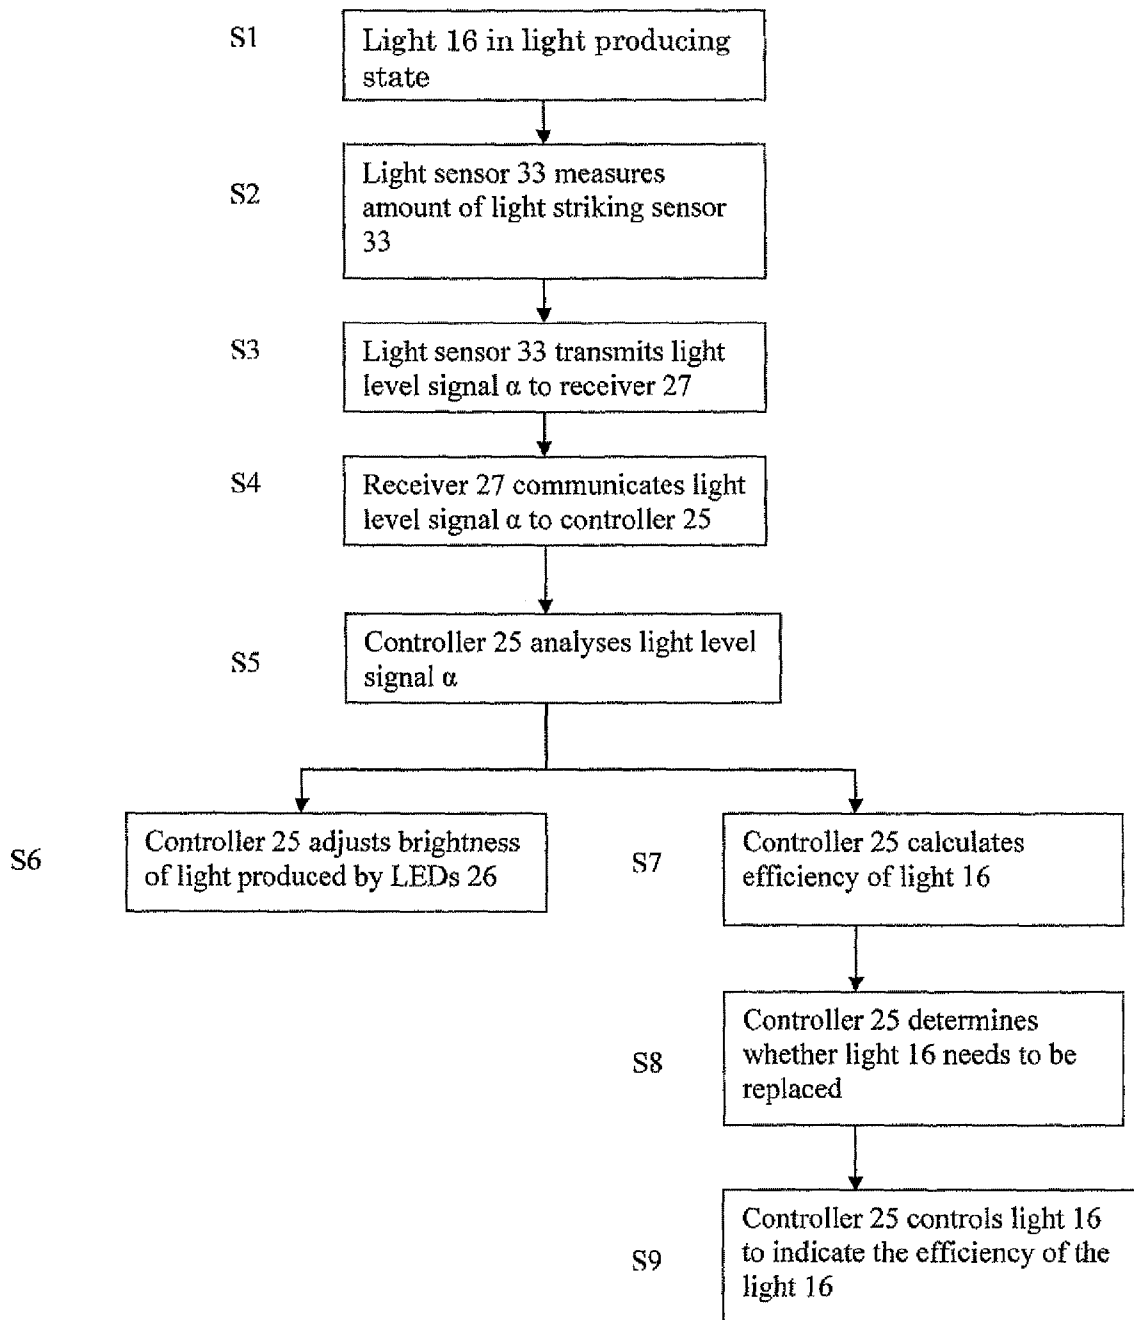

1

LIGHT AND LIGHT SENSOR

STATEMENT OF RELATED CASES

This application claims priority from U.S. Provisional Patent Application Ser. No. 61/108,354 filed Oct. 24, 2008.

FIELD

An LED-based light as described herein relates to “smart buildings” that can automatically control lighting in response to various environmental conditions.

BACKGROUND

Lights in buildings are generally controlled by switches, such as wall-mounted switches in the vicinity of one or more lights. The switch can include a dimmer for varying the brightness of one or more lights. However, lights are often left on when not needed, such as when no people are around the lights or when sources of light besides the lights (e.g., sunlight passing through windows and/or skylights) provide sufficient illumination.

SUMMARY

Known smart buildings that can automatically control various environmental characteristics, such as a lighting brightness level, of one or more rooms of a building are typically expensive to manufacture and install. For example, known smart building components typically are not compatible with standard building fixtures, such as conventional fluorescent tube fixtures, and thus can require an electrician to install.

Examples of LED-based lights described herein can be used to transform a building with standard fixtures, such as standard fluorescent tube fixtures, into a smart building. Many advantages are offered by the LED-based lights described herein, such as allowing for a low-cost smart building and automatically providing an alert when an efficiency of the LED-based light becomes too low.

In one example of an LED-based light tube for use in a conventional fluorescent fixture, a housing includes a light transmitting portion. At least one electrical connector is attached to the housing and configured for engagement with the conventional fluorescent fixture. At least one LED is arranged to produce light in a direction toward the light transmitting portion. A sensor is operable to detect a brightness level and output a corresponding signal. A controller is in electrical communication with the at least one electrical connector and operable to control the at least one LED in response to the signal.

In one example of a system for measuring the efficiency of a light, an LED-based light includes at least one electrical connector compatible with a standardized light fixture, at least one LED, and a controller in electrical communication with the at least one electrical connector and operable to control the at least one LED. A sensor is in communication with the controller and operable to detect a brightness level. The controller is operable to estimate an efficiency of the at least one LED at least partially based on the brightness level detected by the sensor.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view of an example of an LED light tube;

2

FIG. 2 is a schematic perspective view of a smart building system;

FIG. 3 is a schematic perspective view of yet another example of an LED light tube; and

FIG. 4 is a flowchart illustrating operation of an example of an LED light tube.

DESCRIPTION

FIGS. 1-4 are discussed in reference to a light and a light sensor. As shown in FIG. 1, a light fixture 14 can accept an LED-based light 16. The light fixture 14 can be designed to accept standard fluorescent tubes, such as a T-5, T-8, or T-12 fluorescent tube, or other standard sized light, such as incandescent bulbs. Alternatively, the fixture 14 can be designed to accept non-standard sized lights, such as lights installed by an electrician.

The LED light tube 16 can include a housing 22, a circuit board 24, LEDs 26, a pair of end caps 28, a controller 25, and a receiver 27 as shown in FIG. 1. The housing 22 as shown in FIG. 1 is a light transmitting cylindrical tube. The housing 22 can be made from polycarbonate, acrylic, glass or another light transmitting material (i.e., the housing 22 can be transparent or translucent). For example, a translucent housing 22 can be made from a composite, such as polycarbonate with particles of a light refracting material interspersed in the polycarbonate. While the illustrated housing 22 is cylindrical, housings having a square, triangular, polygonal, or other cross sectional shape can alternatively be used. Similarly, while the illustrated housing 22 is linear, housings having an alternative shape, e.g., a U-shape or a circular shape can alternatively be used. Additionally, the housing 22 need not be a single piece as shown in FIG. 1. Instead, another example of a housing can be formed by attaching multiple individual parts, not all of which need be light transmitting. For example, such a housing can include an opaque lower portion and a lens or other transparent cover attached to the lower portion to cover the LEDs 26. The housing 22 can be manufactured to include light diffusing or refracting properties, such as by surface roughening or applying a diffusing film to the housing 22. For compatibility with the fixture 14 as discussed above, the housing 22 can have a length such that the light 16 is approximately 48" long, and the housing 22 can have a 0.625", 1.0", or 1.5" diameter.

The circuit board 24 as illustrated in FIG. 1 is an elongate printed circuit board. Multiple circuit board sections can be joined by bridge connectors to create the circuit board 24. The circuit board 24 as shown in FIG. 1 is slidably engaged with the housing 22, though the circuit board 24 can alternatively be clipped, adhered, snap- or friction-fit, screwed or otherwise connected to the housing 22. For example, the circuit board 24 can be mounted on a heat sink that is attached to the housing 22. Also, other types of circuit boards may be used, such as a metal core circuit board. Or, instead of a circuit board 24, other types of electrical connections (e.g., wires) can be used to electrically connect the LEDs 26 to a power source.

The light 16 can include two bi-pin end caps 28 (i.e., each end cap 28 can carry two pins), one at each longitudinal end of the housing 22, for physically and electrically connecting the light 16 to the fixture 14. The end caps 28 can be the sole physical connection between the light 16 and the fixture 14. The end caps 28 can be electrically connected to the circuit board 24 to provide power to the LEDs 26. Each end cap 28 can include two pins, though two of the total four pins can be “dummy pins” that do not provide an electrical connection. Alternatively, other types of electrical connectors can be

used, such as an end cap carrying a single pin. Also, while the end caps **28** are shown as including cup-shaped bodies, the end caps **28** can have a different configuration (e.g., the end caps **28** can be shaped to be press fit into the housing **22**). One or both of the end caps **28** can additionally include electric components, such as a rectifier and filter.

The LEDs **26** can be surface-mount devices of a type available from Niehia, though other types of LEDs can alternatively be used. For example, although surface-mounted LEDs **26** are shown, one or more organic LEDs can be used in place of or in addition thereto. The LEDs **26** can be mounted to the circuit board **24** by solder, a snap-fit connection, or other means. The LEDs **26** can produce white light. However, LEDs that produce blue light, ultra-violet light or other wavelengths of light can be used in place of white light emitting LEDs **26**.

The number of LEDs **26** can be a function of the desired power of the light **16** and the power of the LEDs **26**. For a 48" light, such as the light **16**, the number of LEDs **26** can vary from about five to four hundred such that the light **16** outputs approximately 500 to 3,000 lumens. However, a different number of LEDs **26** can alternatively be used, and the light **16** can output a different amount of lumens. The LEDs **26** can be evenly spaced along the circuit board **24**, and the spacing of the LEDs **26** can be determined based on, for example, the light distribution of each LED **26** and the number of LEDs **26**.

The controller **25** can be mounted on the circuit board **24**, and can include a memory and a CPU for executing a program stored on the memory. That is, the controller **25** can include a microprocessor or other digital or analog circuit that performs the tasks described herein. The controller **25** can be in communication with the LEDs **26**, the end caps **28**, and the receiver **27** via the circuit board **24**, though the controller **25** can alternatively be in communication with the LEDs **26**, end caps **28**, and/or receiver **27** using wires or another connection. The controller **25** can also be configured to regulate the amount of power provided to the LEDs **26**. That is, the controller **25** can govern the amount of power provided from the end caps **28** to the LEDs **26**. The controller **25** can be in communication with multiple subsets of LEDs **26** (such as individual LEDs **26**) for providing a different amount of power to one or more of the subsets of LEDs **26**. Alternatively, a controller can be external of the light **16**. For example, a controller can be coupled to the fixture **14** to control a light attached to the fixture **14**.

The light **16** can additionally include a receiver **27** mounted on the circuit board **24**. The receiver **27** can be in communication with the controller **25** as mentioned above and with a remote transmitter as is discussed below in greater detail. For example, the receiver **27** can be in communication with the transmitter using a standard wireless protocol (e.g., a radio standard, a cellular standard such as 3G, Bluetooth, or WiFi). The receiver **27** can alternatively be in communication with the transmitter in another manner such as hardwiring or via electric signals sent through the end caps **28**. The receiver **27** can be configured to receive signals from the transmitter, and the receiver **25** can transmit received signals to the controller **25**.

While the light **16** is shown as being compatible with standard sized fluorescent fixtures, an LED-based light having another shape, such as an incandescent bulb or another type of light, can alternatively be used. Also, other types of light sources, such as fluorescent or incandescent based light sources, can be used instead of the LEDs **26**.

As illustrated in FIG. 2, the fixture **14** can be in a building **11** including a light switch **31** and a light sensor **33**, and the light **16** can be installed in the fixture **14**. The light switch **31**

can control whether power is provided to the fixture **14**. However, as is mentioned above and described below in greater detail, the controller **25** can control whether power is provided to the LEDs **26**, in which case the light switch **31** need not be included. Also, if the building **11** is a "smart" building, the controller **25** and switch **31** can be in communication (e.g., via a wired connection, or via a wireless transmitter and a wireless receiver) such that the controller **25** can override the switch **31** to turn on the light **16** even when the switch **31** is in an off position or vice versa.

The light sensor **33** can detect a level of light in an area of the building **11** including the light **16**, such as an amount of light that strikes the sensor **33**. The light sensor **33** can include an integral transmitter for transmitting a light level signal α to the receiver **27**. The light sensor **33** can continuously transmit the signal, or the light sensor **33** can include a controller (e.g., a controller including a memory and a CPU for executing a program stored on the memory) for deciding when to transmit the signal. In addition to the light sensor **33**, other sensors can be in communication with the light **16**. For example, the building **11** can also include a motion sensor, a sensor for determining whether a door is ajar, a sensor for determining when a keypad or other type of lock is actuated, a voice-activated sensor, a clock or calendar, a light sensor for measuring an amount of light in the building **11** other than or including light provided by the light **16** (e.g., an amount of sunlight entering the building **11**), a power supply monitor, and/or another type of sensor.

In operation, as shown by in FIG. 4, the light **16** produces light in step S1. In step S2 the light sensor **33** can measure the amount of light that strikes the sensor **33**, and the light sensor **33** can transmit the light level signal α to the receiver **27** as shown in step S3. The receiver **27** can communicate the light level signal α to the controller **25** as shown in step S4.

In step S5, the controller **25** can analyze the light level signal α . For example, the controller **25** can estimate a brightness of an area of the building **11** including the light **16**, the controller **25** can compare the light level to a predetermined value (e.g., an amount of light comfortable for an ordinary person), or can analyze the light level signal α in some other manner. Depending on the light level signal α , the controller **25** can control the light **16** in various ways. For example, as shown in step S6, the controller **25** can adjust the brightness of light produced by the LEDs **26**. If the light level signal α indicates the amount of light detected is too high, the controller **25** can dim the LEDs **26** or turn a subset of the LEDs **26** off. Alternatively, if the amount of light is too low, the controller **25** can increase the brightness of the LEDs **26** or turn on a subset of the LEDs **26** that were previously off. Thus, the controller **25** can correct the amount of light provided by the light **16** in response to changes in ambient light, such as if a level of natural light entering the area of the building **11** including the light **16** increases or decreases, or if other lights are turned on or off.

In another example not illustrated, the light **16** can initially not be producing light. The controller **25** can control the light **16** to begin producing light in response to the light level signal α . For example, the light level signal α can indicate that the amount of light in an area of the building **11** is below a predetermined level.

To avoid interference with the light sensor **33** by the light emitted by the LEDs **26**, the light sensor **33** can sense ambient light during a short period, invisible to the eye, when the LEDs **26** are off. This short off period can occur due to line voltage zero-crossing, or a command from the controller **25**.

5

Therefore, among other advantages, an occupant of the area of the building 11 including the light 16 can avoid having to make an effort to turn on the light.

Returning to FIG. 3, as another example of operation of the light 16 shown in step S7, the light level signal α can be analyzed by the controller 25 to determine an efficiency of the light 16. For example, the controller 25 can compare the amount of detected light with a reference value, such as an amount of light detected at a previous date if the light 16 includes a clock and/or calendar. The previous date can be a date when conditions such as ambient light conditions were similar, such as a recent day at approximately the same time. The difference between the current amount of light being produced and the previous amount of light being produced can be used to calculate a change in efficiency of the light 16. The controller 25 can make this efficiency determination without turning the light 16 off, which can be beneficial if the light 16 is in a location such as a stairwell where a lack of light can be dangerous. As an alternative efficiency test, the controller 25 can compare the amount of detected light when the light 16 is on with an amount of light detected when the light 16 is off, with the difference being used to calculate an amount of light produced by the light 16.

The controller 25 can calculate the efficiency by comparing the amount of light produced by the light 16 with the reference value (e.g., an amount of light produced by the light 16 operating under ideal conditions), or by comparing the amount of light produced by the light 16 with the amount of power consumed by the light 16 (which can be measured with an ammeter and voltmeter, a wattmeter, or another power measuring device either integral with the light 16, electrically coupled to the fixture 14, or at another location).

As shown in step S8, the controller 25 can also determine whether the light 16 should be replaced. For example, the controller 25 can compare the efficiency of the light 16 with a predetermined value to determine whether the light 16 should be replaced. The predetermined value can be a predetermined efficiency standard, such as the efficiency of the light 16 when new, the efficiency of an ideal light, a maximal output of the light 16, or some other value.

The controller 25 can also control the light 16 to indicate its efficiency, which can provide notice that the light 16 should be replaced. For example, the controller 25 can control the light 16 to display its efficiency using a digital read-out integral with the light 16, a bar of light having a length equivalent with the efficiency, or in another manner. Alternatively, the controller 25 can control the light 16 to display when the efficiency of the light 16 is below a predetermined value, such as by illuminating at least one of the LEDs 26 having a different color than surrounding LEDs 26, by causing at least one of the LEDs 26 to flash, or by controlling the light 16 in some other manner. Once the efficiency of the light 16 drops below the predetermined value, it can be understood that the light 16 should be replaced. Thus, the light 16 can signal to a maintenance worker or other personnel that the light 16 should be replaced.

Another light 40 as shown in FIG. 3 includes the housing 22, the circuit board 24, the controller 25, the LEDs 26, and the end caps 28 similar to the light 16. The light 40 can additionally include an integral light level sensor 42 and a transmitter 44. The light sensor 42 can be mounted on the circuit board 24 to receive power via the end caps 28, and the light sensor 42 can be in communication with the controller 25 and/or the transmitter 44. The light level sensor 42 can protrude from the housing 22 as shown in FIG. 3 or otherwise be positioned to sense an amount of light produced by at least some of the LEDs 26 (e.g., the sensor 42 can alternatively be

6

contained within the housing 22, and one or more reflectors can be included to direct a portion of light toward the sensor 42). Alternatively, the light level sensor 42 can detect an amount of ambient light. The amount of ambient light can include light produced by the LEDs 26. The sensor 42 can communicate the light level signal α to the controller 25.

The transmitter 44 can be mounted on the circuit board 24 for receiving power via the end caps 28. The transmitter 44 can be in communication with the controller 25 and/or the light sensor 24 for receiving the light level signal α . The transmitter 44 can be configured to transmit the light level signal α to a remote location, such as a smart building control center or another smart building component.

With this configuration, the controller 25 in the light 40 can control the LEDs 26 and calculate an efficiency of the light based on the light level signal α as discussed above in reference to the light 16. The light 40 can also indicate whether the light 40 should be replaced similar to as described above in reference to the light 16. Additionally, the inclusion of the transmitter 44 allows the light 40 to perform other functions. The transmitter 44 can transmit the light level signal α to the remote location, allowing the light level signal α to be used for controlling another component of a smart building (e.g., window shades, another light, or some other component of a smart building) or for another purpose. For example, the transmitter 44 can transmit an efficiency of the light 40 or an indication that the light 40 should be replaced to the remote location.

The light 40 can also include another sensor, such as a motion detector, in communication with the controller 25 and/or the transmitter 44. In this case, the controller 25 can take signals other than the light level signal α into consideration in controlling the LEDs 26. For example, the controller 25 can turn the LEDs 26 off even though the light level sensor 42 detects a low level of light if the motion sensor has not detected movement for a certain amount of time. As a similar example, the controller 25 can turn the LEDs 26 off even though the light level sensor 42 detects a low level of light if a clock or calendar in communication with the controller 25 indicates the time is not during standard working hours.

The above-described embodiments have been described in order to allow easy understanding of the invention and do not limit the invention. On the contrary, the invention is intended to cover various modifications and equivalent arrangements included within the scope of the appended claims, which scope is to be accorded the broadest interpretation so as to encompass all such modifications and equivalent structure as is permitted under the law.

What is claimed:

1. An LED-based light tube for use in a conventional fluorescent fixture comprising:
 - a housing including a light transmitting portion;
 - at least one electrical connector attached to the housing and configured for engagement with the conventional fluorescent fixture;
 - at least one LED arranged to produce light in a direction toward the light transmitting portion;
 - a sensor operable to detect a brightness level and output a signal corresponding to the detected brightness level; and
 - a controller in electrical communication with the at least one electrical connector and operable to compare the signal to a predetermined value corresponding to a desired brightness level and control an amount of power provided to the at least one LED in response to the signal to adjust the light produced by the at least one LED to achieve the desired brightness level, wherein the con-

7

troller is operable to estimate an efficiency of the at least one LED at least partially based on the brightness level detected by the sensor and wherein the estimated efficiency of the at least one LED is at least partially based on a comparison between a power consumption of the at least one LED and the brightness level detected by the sensor.

2. The LED-based light tube of claim 1, further comprising a circuit board disposed within the housing, and wherein the at least one LED, sensor and controller are mounted on the circuit board.

3. The LED-based light tube of claim 1, wherein the at least one LED, the sensor and the controller are in electrical communication with the at least one electrical connector.

4. The LED-based light tube of claim 1, wherein the at least one electrical connector includes a pair of bi-pin electrical connectors attaching to opposing ends of the housing.

5. The LED-based light tube of claim 1, wherein the estimated efficiency of the at least one LED is at least partially based on a comparison of the brightness level detected by the sensor with a reference brightness level.

6. The LED-based light tube of claim 1, wherein the controller is operable to activate an alarm when the estimated efficiency of the at least one LED is below a predetermined amount.

7. The LED-based light tube of claim 6, wherein the alarm includes at least one of operating an LED that produces colored light, displaying the efficiency of the at least one LED on a display, and operating at the at least one LED in a flashing pattern.

8. The LED-based light of claim 1, further comprising a transmitter operable to transmit at least one of the brightness level and the estimated efficiency of the at least one LED.

9. A system for measuring the efficiency of a light comprising:

an LED-based light including at least one electrical connector compatible with a standardized light fixture, at least one LED, and a controller in electrical communi-

8

cation with the at least one electrical connector and operable to control the at least one LED; and a sensor in communication with the controller and operable to detect a brightness level;

wherein the controller is operable to estimate an efficiency of the at least one LED at least partially based on the brightness level detected by the sensor and wherein the estimated efficiency of the at least one LED is at least partially based on a comparison between a power consumption of the at least one LED and the brightness level detected by the sensor.

10. The system of claim 9, wherein the controller is operable to control the at least one LED in response to the brightness level detected by the sensor.

11. The system of claim 9, wherein the controller is operable to activate an alarm when the estimated efficiency of the at least one LED is below a predetermined value.

12. The system of claim 11, wherein the alarm includes at least one of operating an LED that produces colored light, displaying the efficiency of the at least one LED on a display, and operating at the at least one LED in a flashing pattern.

13. The system of claim 9, wherein the estimated efficiency of the at least one LED is at least partially based on a comparison of the brightness level detected by the sensor with a reference brightness level.

14. The system of claim 9, wherein the at least one electrical connector includes a pair of bi-pin electrical connectors compatible with a standard fluorescent tube fixture.

15. The system of claim 9, wherein the LED-based light further comprising a circuit board, and wherein the at least one LED, the controller and the sensor are mounted on the circuit board.

16. The system of claim 9, wherein the sensor is remote from the LED-based light and operable to transmit a signal corresponding to the brightness level, the LED-based light further comprising a receiver in communication with the sensor and the controller.

* * * * *